




OVERVIEW HIGH PRESSURE BARREL PUMPS



	FP001	FP015	FP045	FP050	FP200
Pumping medium	lubricants up to NLGI class 3	lubricants up to NLGI class 3	lubricants up to NLGI class 3	highly viscous and solvent-free media	highly viscous and solvent-free media
Displacement/ double stroke	19 cm ³	19 cm ³	19 cm ³	79 cm ³	79 cm ³
Conveying capacity	1140 cm ³ /min	1140 cm ³ /min	1140 cm ³ /min	4740 cm ³ /min at 60 double strokes/min	4740 cm ³ /min at 60 double strokes/min
Transmisson	25:1	25:1	25:1	24:1 (FP050-24); 45:1 (FP050-45)	24:1 (FP200-24); 45:1 (FP200-45)
Diameter follower plate	customized	customized	customized	customized	530 mm
Max. container dimensions	1 kg can; height 200 mm	Ø 335 mm; height 360 mm	Ø 420 mm; height 670 mm	Ø 420 mm; height 670 mm	200 l standard barrel
	more	more	more	more	more

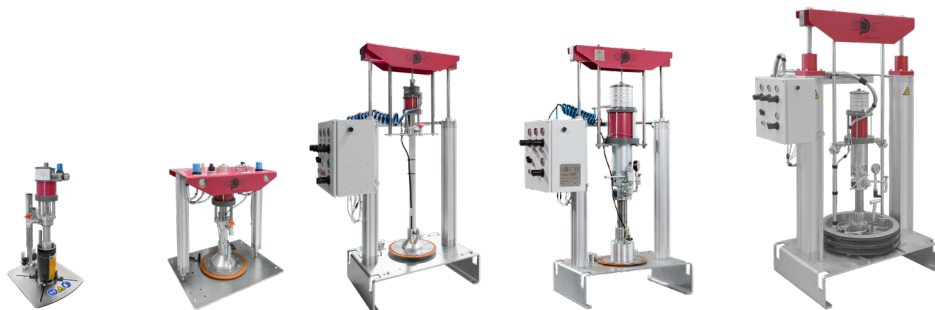

	FP045-T	FP050-T	FP200-T	FP200-S
Pumping medium	lubricants up to NLGI class 3	lubricants up to NLGI class 3	highly viscous and solvent-free media	highly viscous and solvent-free media
Displacement/ double stroke	19 cm ³	79 cm ³	79 cm ³	79 cm ³ /double stroke
Conveying capacity	1140 cm ³ /min	4740 cm ³ /min at 60 double strokes/min	4740 cm ³ /min at 60 double strokes/min	4740 cm ³ /min at 60 double strokes/min
Transmisson	25:1	24:1 (FP050-24); 45:1 (FP050-45)	24:1 (FP200-24-T); 45:1 (FP200-45-T)	24:1 (FP200-24-S); 45:1 (FP200-45-S)
Diameter follower plate	customized	customized	530 mm	530 mm (FP200-24-S); 360 mm (storage unit)
Max. container dimensions	Ø 420 mm; height 670 mm	Ø 420 mm; height 670 mm	200 l standard barrel	200 l standard barrel
	more	more	more	more